



HS  TARM


Bonus Plus

Wood-fired
Gasification
Add-on Boiler

- No compromise affordability
- Small footprint, high output
- Low maintenance design
- Induced Draft Gasification Technology
- Legendary HS Tarm build strength



The little sibling of the Solo Innova, the Bonus Plus is ideally sized for small to mid-sized homes with average to good insulation. When combined with thermal storage, the Bonus Plus allows for energy independence and is sure to provide the satisfaction that results from realizing a smart investment.

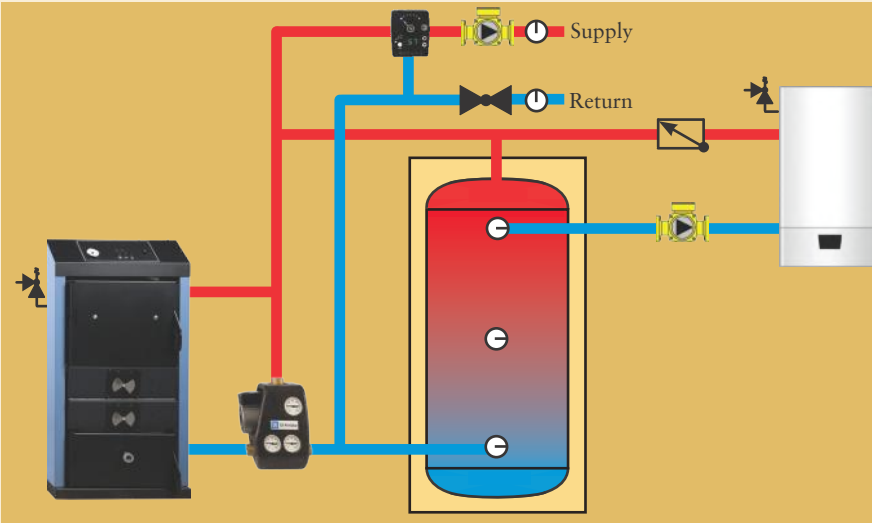

Easy Integration

Tarm Biomass has unparalleled expertise integrating wood boilers with conventional heating systems. We offer our customers a variety of conceptual diagrams that may be used to connect new boilers to existing heating systems, whether forced air, in-floor radiant, baseboard, or any type of heating system in between.

Big Heat Small Price

Your "Bonus" is affordability "Plus" no compromising with this efficient and clean burning boiler, which exceeds Europe's Class 5 rating¹. At 825 pounds, the Bonus Plus is no lightweight with regard to quality or features.

- Round heat exchange tubes are vertically oriented and arrive standard with turbulators for increased ash separation and efficiency.
- 28" high flue collar and short over-all boiler height allows installation in basements with low ceilings and connection to almost any chimney thimble.
- Reversible, full firebox width doors.
- Firebox heat cladding for enhanced combustion.
- High quality EBM induction blower.
- Firebase primary air for consistent clean combustion.
- Arrives fully assembled.
- Exterior mounted doors to all air and exhaust passages for simple maintenance.
- Danish engineering derives high function from simple form.


¹ Minimum boiler efficiency of 88.47%, CO <700 mg/m³, OGC <30mg/m³, Dust <60 mg/m³

Warranty

Each Bonus Plus boiler, when installed with an adequate heat storage system, is covered by a 20-year limited warranty. A copy is available for your inspection, and is provided with each boiler.

Disclaimer

Tarm Biomass® is not responsible for factory alterations to measurements. For final specifications and operational requirements, please see the Bonus Plus Owner's Manual.

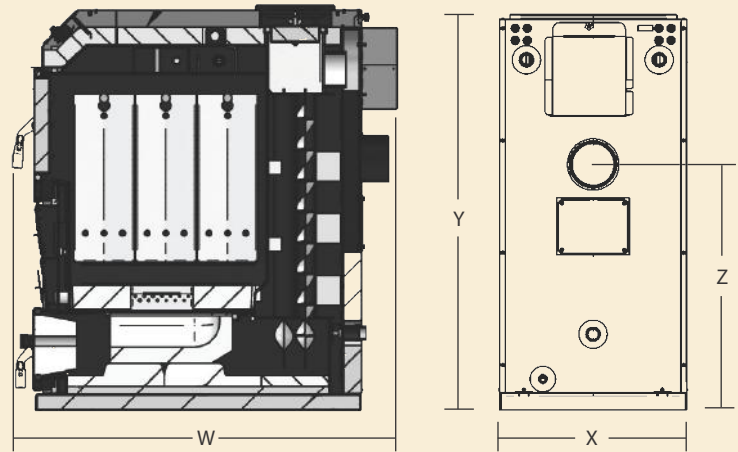

Technical Data

Maximum heat output	BTU/hr	102,000
Firebox volume	cubic feet	3.2
Load door	in. X in.	13¾ X 12
Max. wood length	inches	20
Unit length W	inches	43
Unit width X	inches	23
Unit height Y	inches	45
Water Volume	gallons	31.7
Weight	pounds	825
Flue collar size	inches	5
Height of flue collar Z	inches	28

Dimensions are subject to technical alterations.

Pressure tested in accordance with EN 303-5, NON-ASME